



The Timken Company

4500 Mt Pleasant St. NW

N. Canton, OH 44720


Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Timken Part Number JP10049 - JP10010, Tapered Roller Bearings - TS (Tapered Single)

Metric

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

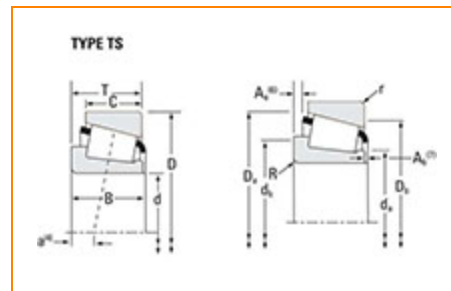

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	JP10000
Cone Part Number	JP10049
Cup Part Number	JP10010
Design Units	METRIC
Bearing Weight	1.1 Kg 2.5 lb
Cage Type	Stamped Steel

Dimensions

d - Bore	100 mm 3.937 in
D - Cup Outer Diameter	145.000 mm 5.7087 in
B - Cone Width	22.500 mm 0.8858 in
C - Cup Width	17.500 mm 0.6890 in
T - Bearing Width	24.000 mm 0.9449 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	3.050 mm 0.12 in
r - Cup Backface "To Clear" Radius²	3.05 mm 0.12 in
da - Cone Frontface Backing Diameter	105.92 mm 4.17 in
db - Cone Backface Backing Diameter	112.01 mm 4.41 in
Da - Cup Frontface Backing Diameter	140 mm 5.55 in
Db - Cup Backface Backing Diameter	134.11 mm 5.28 in
Ab - Cage-Cone Frontface Clearance	3.8 mm 0.15 in
Aa - Cage-Cone Backface Clearance	1.3 mm 0.05 in
a - Effective Center Location³	6.1 mm 0.24 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	32500 N 7310 lbf
C1 - Dynamic Radial Rating (1 million revolutions)⁵	125000 N 28200 lbf
C0 - Static Radial Rating	172000 N 38700 lbf
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	26300 N 5920 lbf

Factors

K - Factor⁷	1.24
e - ISO Factor⁸	0.47
Y - ISO Factor⁹	1.27
G1 - Heat Generation Factor (Roller-Raceway)	104
G2 - Heat Generation Factor (Rib-Roller End)	40.9
C_g - Geometry Factor¹⁰	0.126

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.


⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for

instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

¹⁰ Geometry constant for Lubrication Life Adjustment Factor a_3 .

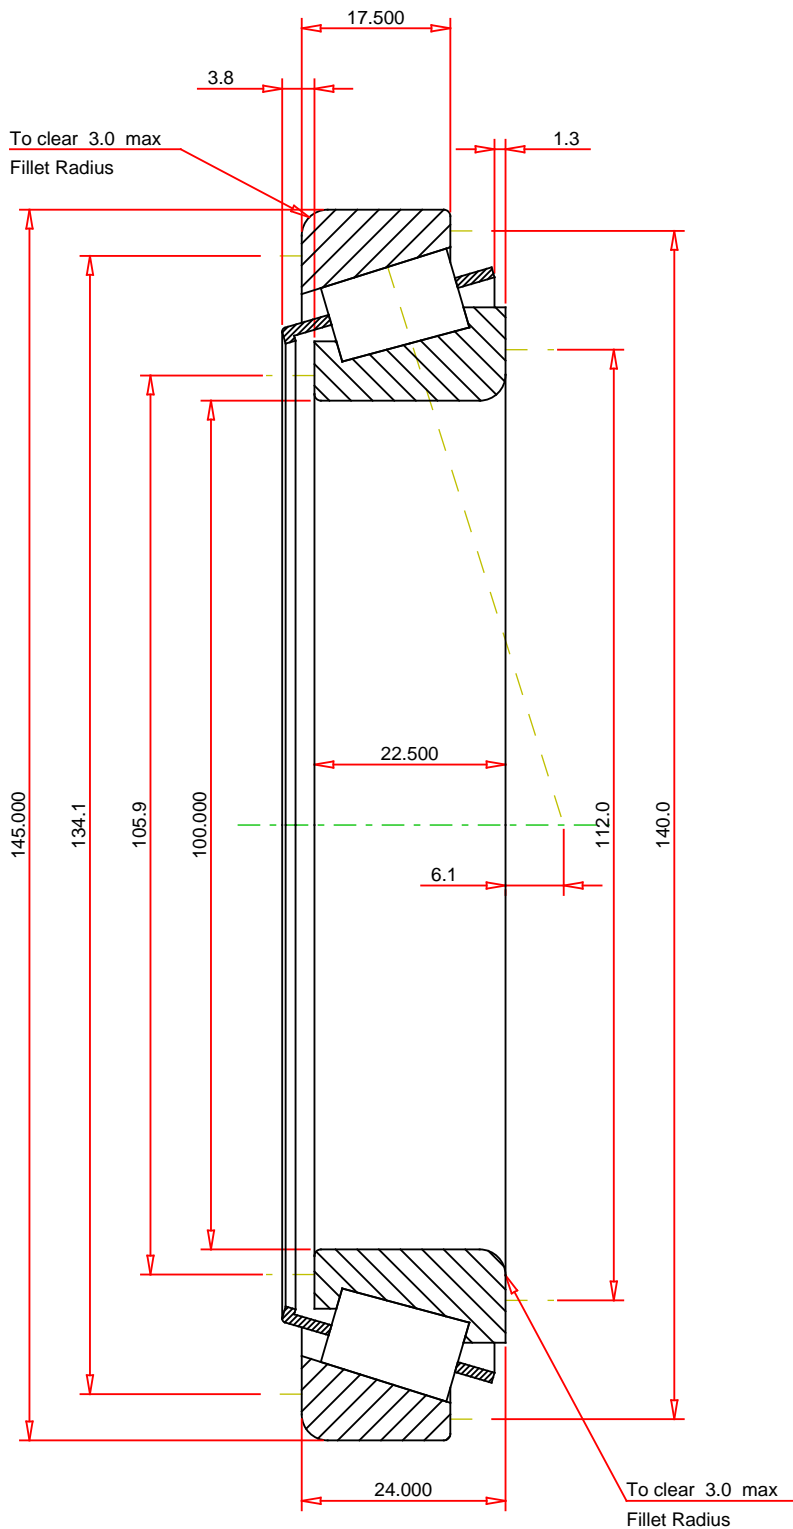

METRIC UNITS

ISO Factor - e	0.47
ISO Factor - Y	1.27
Bearing Weight	1.1 kg
Number of Rollers Per Row	25
Effective Center Location	6.1 mm



**JP10049 - JP10010
TS BEARING ASSEMBLY**

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

K Factor	1.24	
Dynamic Radial Rating - C90	32500	N
Dynamic Thrust Rating - Ca90	26300	N
Static Radial Rating - C0	172000	N
Dynamic Radial Rating - C1	125000	N

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY