



**The Timken Company**

4500 Mt Pleasant St. NW

N. Canton, OH 44720


Phone: (234) 262-3000

E-Mail: [CustomerCAD@timken.com](mailto:CustomerCAD@timken.com) • Web site: [www.timken.com](http://www.timken.com)

Timken Part Number LM522548 - LM522510, Tapered Roller Bearings - TS (Tapered Single)

Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

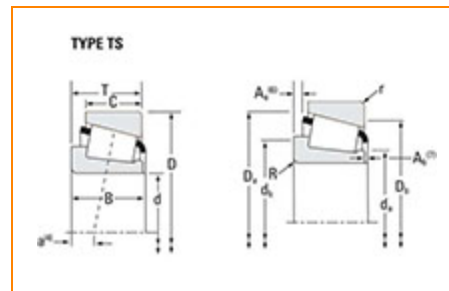

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

## Specifications

Series	LM522500
Cone Part Number	LM522548
Cup Part Number	LM522510
Design Units	Imperial
Bearing Weight	2.2 Kg 4.8 lb
Cage Type	Stamped Steel

## Dimensions

<b>d - Bore</b>	109.987 mm 4.3302 in
<b>D - Cup Outer Diameter</b>	159.987 mm 6.2987 in
<b>B - Cone Width</b>	34.925 mm 1.3750 in
<b>C - Cup Width</b>	26.988 mm 1.0625 in
<b>T - Bearing Width</b>	34.925 mm 1.3750 in

### Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>1</sup></b>	7.870 mm 0.310 in
<b>r - Cup Backface "To Clear" Radius<sup>2</sup></b>	3.3 mm 0.130 in
<b>da - Cone Frontface Backing Diameter</b>	118.11 mm 5.59 in
<b>db - Cone Backface Backing Diameter</b>	133.10 mm 5.24 in
<b>Da - Cup Frontface Backing Diameter</b>	154.43 mm 6.08 in
<b>Db - Cup Backface Backing Diameter</b>	146.05 mm 5.75 in
<b>Ab - Cage-Cone Frontface Clearance</b>	2 mm 0.08 in
<b>Aa - Cage-Cone Backface Clearance</b>	2.3 mm 0.09 in
<b>a - Effective Center Location<sup>3</sup></b>	-1.5 mm -0.06 in

## Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>4</sup></b>	11400 lbf 50700 N
<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>5</sup></b>	44000 lbf 196000 N
<b>C0 - Static Radial Rating</b>	80300 lbf 357000 N
<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>6</sup></b>	7850 lbf 34900 N

## Factors

<b>K - Factor<sup>7</sup></b>	1.45
<b>e - ISO Factor<sup>8</sup></b>	0.4
<b>Y - ISO Factor<sup>9</sup></b>	1.49
<b>G1 - Heat Generation Factor (Roller-Raceway)</b>	232
<b>G2 - Heat Generation Factor (Rib-Roller End)</b>	63.3
<b>C<sub>g</sub> - Geometry Factor<sup>10</sup></b>	0.158

<sup>1</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>2</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>3</sup> Negative value indicates effective center inside cone backface.

<sup>4</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.

<sup>5</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>6</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.


<sup>7</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for

instruction on use.

<sup>9</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>10</sup> Geometry constant for Lubrication Life Adjustment Factor  $a_3$ .

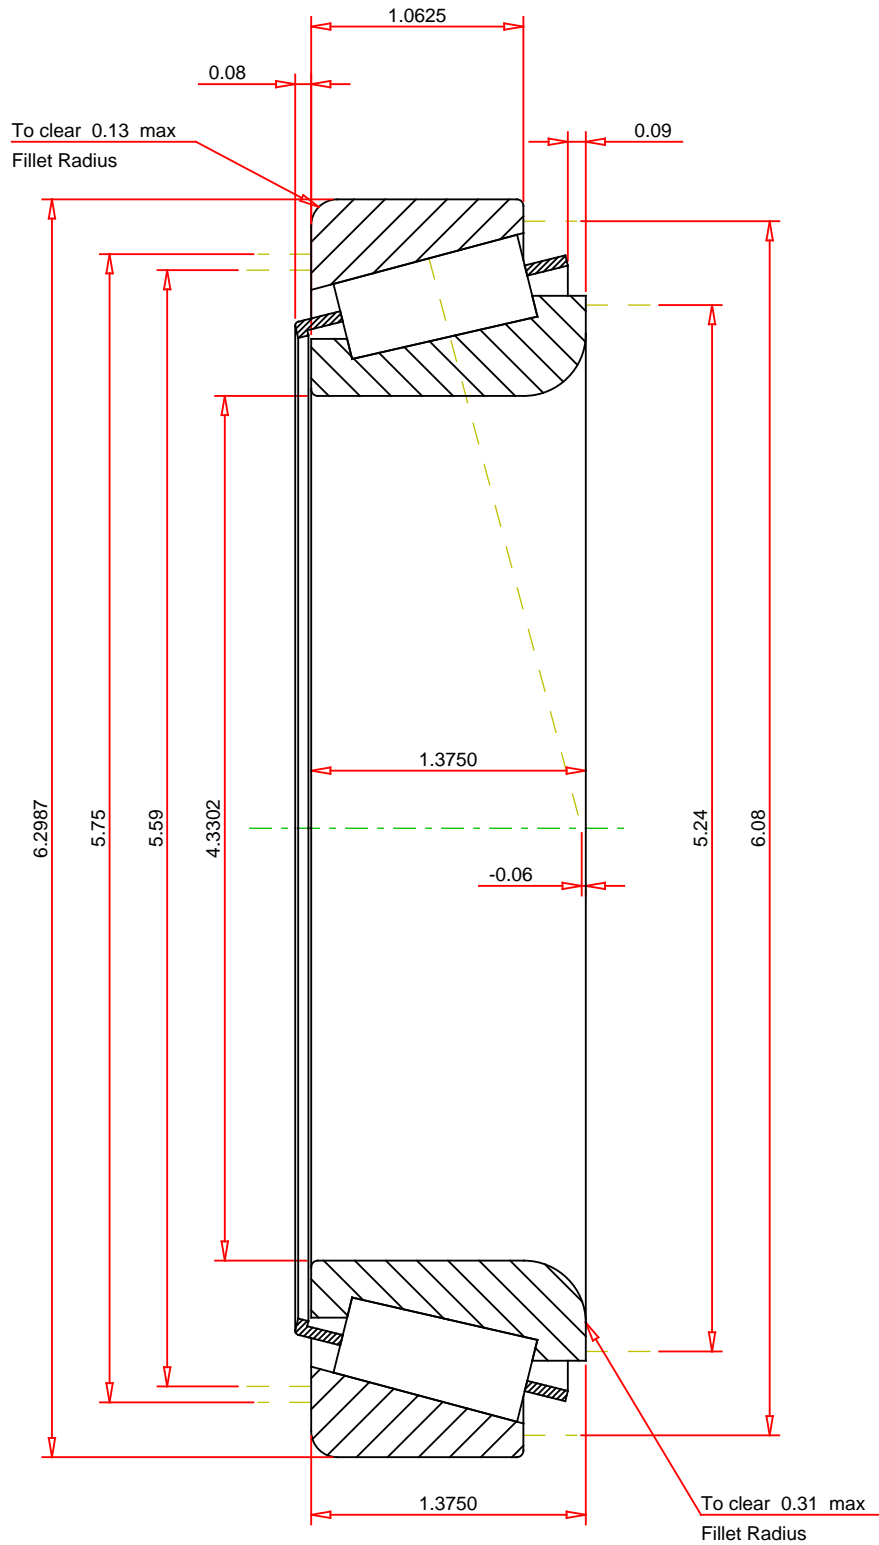

IMPERIAL UNITS

ISO Factor - e	0.4
ISO Factor - Y	1.49
Bearing Weight	4.8 lbf
Number of Rollers Per Row	34
Effective Center Location	-0.06 inch

**TIMKEN**®

LM522548 - LM522510  
TS BEARING ASSEMBLY

**THE TIMKEN COMPANY**  
NORTH CANTON, OHIO USA

K Factor	1.45
Dynamic Radial Rating - C90	11400 lbf
Dynamic Thrust Rating - Ca90	7850 lbf
Static Radial Rating - C0	80300 lbf
Dynamic Radial Rating - C1	44000 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY